



# DYNACO M2 COMPACT

**Push-Pull**  
gear driven technology



inside door

[www.dynacodoor.com](http://www.dynacodoor.com)



# DYNACO M2 COMPACT


The DYNACO Compact M2 is specifically designed for medium sized inside applications with intensive use. It protects your environment against drafts, humidity, dust and dirt. Operating speed and perfect sealing properties improve your traffic flows and provide employee comfort, environmental control and savings on energy costs. The absence of rigid elements in the curtain and its soft bottom edge make the DYNACO Compact M2 intrinsically safe.

- **HIGH SPEED OPERATION:**  
Up to 2,4 m/s depending on the size.  
Closing speed 1,2 m/s.
- **“PUSH PULL” TECHNOLOGY:**  
Unique door drive system.
- **SUPERIOR SEAL:**  
Patented side frame assembly. Neither blade nor brush systems required.
- **CRASH FORGIVING AND SELF-REINSERTING WITHOUT INTERVENTION:**  
The curtain automatically reinserts itself when dislodged. No repair costs, no production down time.
- **USER SAFETY:**  
Flexible curtain without rigid elements.
- **COMFORT OF USE:**  
DYNACO wireless detector at the bottom.
- **ADVANCED DRIVE:**  
Frequency driven motor and encoder for smooth operation. Wearable elements are reduced to a minimum.
- **DYNALOGIC CONTROL BOX:**  
User-friendly control box with self-diagnosis.
- **CONFORM TO EN13241-1**

Safe



“PUSH-PULL<sup>PT</sup>” Drive Technology

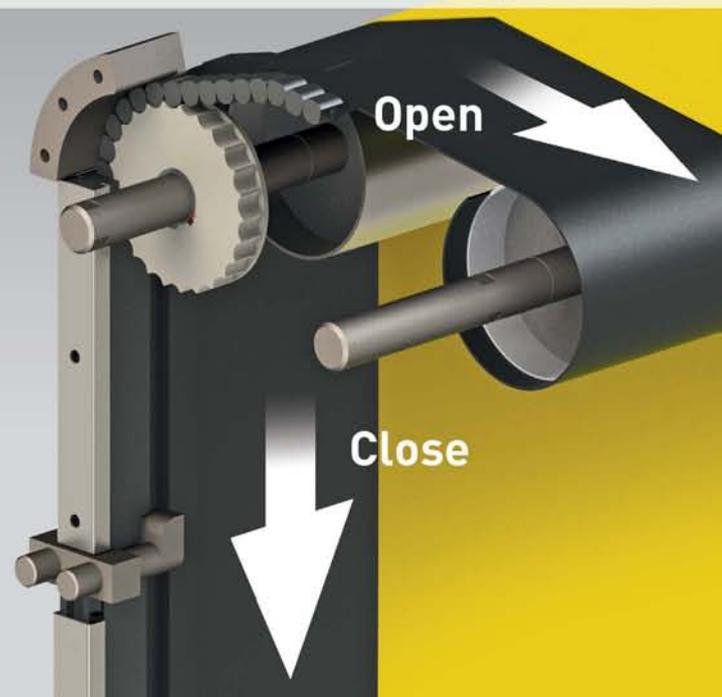



## EN13241-1 STANDARDS


| Standard              | Ref.     | Test acc. | Results                 |
|-----------------------|----------|-----------|-------------------------|
| Water permeability    | EN 12425 | EN 12489  | Class 1                 |
| Wind load             | EN 12424 | EN 12444  | Class 1*                |
| Wind permeability     | EN 12426 | EN 12427  | Class 1                 |
| Safe openings         | EN 12453 | EN 12445  | Pass                    |
| Mechanical resistance | EN 12604 | EN 12605  | Pass                    |
| Unintended movements  | EN 12604 | EN 12605  | Pass                    |
| Thermal resistance    | EN 12428 | EN 12428  | 6,02 W/m <sup>2</sup> K |
| Performance (cycles)  | EN 12604 | EN 12605  | 1.000.000               |

\* Interior applications only


## CHARACTERISTICS

|   |   |                |   |               |   |                |   |              |   |             |   |               |   |              |   |               |   |
|---|---|----------------|---|---------------|---|----------------|---|--------------|---|-------------|---|---------------|---|--------------|---|---------------|---|
| <b>Max. dimensions</b>  | W 5.500 mm x H 5.500 mm   |                |   |               |   |                |   |              |   |             |   |               |   |              |   |               |   |
| <b>Opening speed</b><br><b>Closing speed</b>                        | Up to 2,4 m/s<br>1,2 m/s  |                |   |               |   |                |   |              |   |             |   |               |   |              |   |               |   |
| <b>Structure</b>  | Galvanised steel: 80 x 40 x 3 mm -<br>Option: stainless steel   |                |   |               |   |                |   |              |   |             |   |               |   |              |   |               |   |
| <b>Drum</b>   | Steel - Ø 102 x 2 mm.   |                |   |               |   |                |   |              |   |             |   |               |   |              |   |               |   |
| <b>Side guides</b>  | Reinforced polyethylene (PE-UHMW1000),<br>on springs.   |                |   |               |   |                |   |              |   |             |   |               |   |              |   |               |   |
| <b>Motor</b>  | 4 poles, without brake<br>Power: 0,75 kW or 1,5 kW (depending on size and<br>opening speed).<br>IP rating: IP65.  |                |   |               |   |                |   |              |   |             |   |               |   |              |   |               |   |
| <b>Control box</b>  | DYNALOGIC provided with: Circuit breaker,<br>general divider, adjustable timer, push button for<br>opening and reset and emergency stop.<br>IP rating: IP54.<br>Frequency inverter.   |                |   |               |   |                |   |              |   |             |   |               |   |              |   |               |   |
| <b>Standard detectors</b>   | Infrared barrier: 300 mm from the floor.<br>Wireless DYNACO detector (WDD).   |                |   |               |   |                |   |              |   |             |   |               |   |              |   |               |   |
| <b>Power supply</b>   | Single phase 230V<br>0,75 kW = 14 A / 1,5 kW = 18 A   |                |   |               |   |                |   |              |   |             |   |               |   |              |   |               |   |
| <b>Frequency</b>  | Frequency: 50-60 Hz   |                |   |               |   |                |   |              |   |             |   |               |   |              |   |               |   |
| <b>Available colours</b><br>comparable with:                        | <table border="0"> <tr> <td>Yellow RAL1003</td> <td></td> <td>Green RAL6005</td> <td></td> </tr> <tr> <td>Orange RAL2004</td> <td></td> <td>Grey RAL7035</td> <td></td> </tr> <tr> <td>Red RAL3000</td> <td></td> <td>White RAL9010</td> <td></td> </tr> <tr> <td>Blue RAL5002</td> <td></td> <td>Black RAL9005</td> <td></td> </tr> </table> | Yellow RAL1003 |  | Green RAL6005 |  | Orange RAL2004 |  | Grey RAL7035 |  | Red RAL3000 |  | White RAL9010 |  | Blue RAL5002 |  | Black RAL9005 |  |
| Yellow RAL1003  |    | Green RAL6005  |  |               |   |                |   |              |   |             |   |               |   |              |   |               |   |
| Orange RAL2004  |    | Grey RAL7035   |  |               |   |                |   |              |   |             |   |               |   |              |   |               |   |
| Red RAL3000   |    | White RAL9010  |  |               |   |                |   |              |   |             |   |               |   |              |   |               |   |
| Blue RAL5002  |    | Black RAL9005  |  |               |   |                |   |              |   |             |   |               |   |              |   |               |   |
| [Actual colours may deviate. Colour samples available upon request] |   |                |   |               |   |                |   |              |   |             |   |               |   |              |   |               |   |

## Side guide and lateral driving strap view

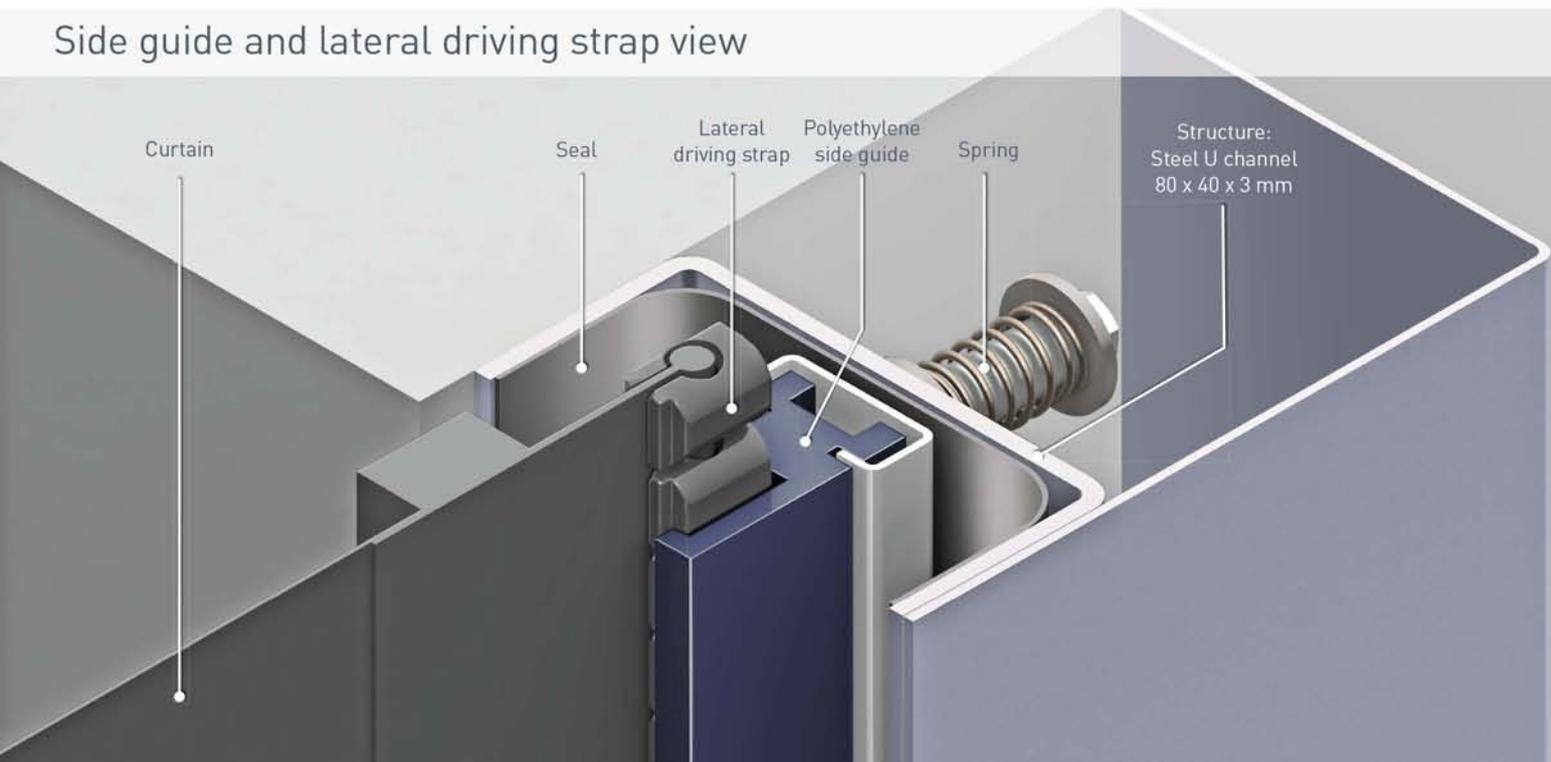

# Dimensions and installation requirements DYNACO M2 COMPACT

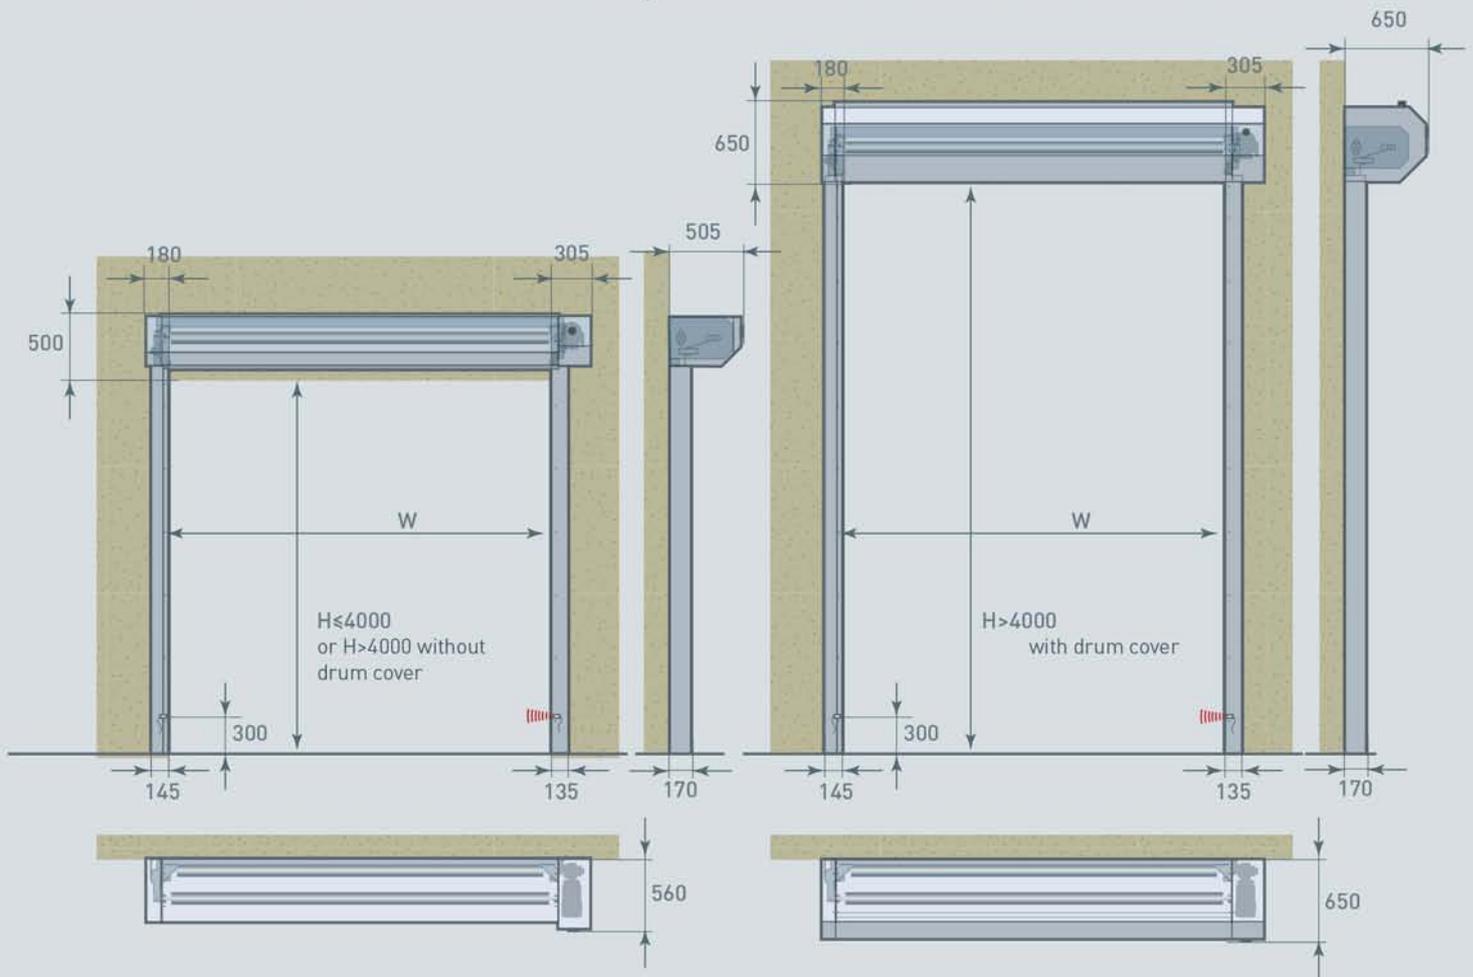

All indicated dimensions are net: the space necessary for mounting and maintenance has to be provided.

REMARK: Based on the risk analysis of the environment, extra push buttons, detectors and covers might be required.

© All rights reserved by Dynaco – 2014

The DYNACO Entrematic products are protected by worldwide registered patents. As part of its policy of continuous product development, DYNACO Entrematic reserves the right to change the characteristics of its products or components without prior notice.

Disclaimers:

For a correct use of our products, please refer to our manual. Everything that is mentioned in this brochure is only valid under the terms of use in the user manual and on condition that the door was properly installed and maintained and has not undergone abuse nor neglect.

## Professional Equipment ( PETE)

PO Box 3448, Iskan-1

Near Water Tank , Al Difa Area

Riyadh - 14424, Kingdom of Saudi Arabia

Telefax : 966 11 4989214

Mob : 966 54 5603773

Email : info@peteksa.com

www.peteksa.com

# ENTRE//MATIC