



ENTRE/MATIC
pete بي تي



DYNACO M2 FREEZER

Push-Pull
gear driven technology



inside door

www.dynacodoor.com




DYNACO M2 FREEZER


The DYNACO Freezer M2 is specially designed for freezer applications. High operating speed and excellent seal allow efficient traffic flow while minimizing temperature variations. Optionally, an insulated curtain is available for additional savings on energy costs. The absence of rigid elements in the curtain and the soft bottom edge make the DYNACO Freezer M2 intrinsically safe.

- **HIGH SPEED OPERATION:**
2,4 m/s opening speed.
1,2 m/s closing speed.
- **PATENTED "PUSH PULL" TECHNOLOGY:**
Unique door drive system.
- **SUPERIOR SEAL:**
Patented side frame assembly. Neither blade nor brush systems required.
- **CRASH FORGIVING AND SELF-REINSERTING WITHOUT INTERVENTION:**
The curtain automatically reinserts itself when dislodged. No repair costs, no production down time.
- **USER SAFETY:**
Flexible curtain without rigid elements.
- **COMFORT OF USE:**
DYNACO wireless detector at the bottom.
- **ADVANCED DRIVE:**
Frequency driven motor and encoder for smooth operation. Wearable elements are reduced to a minimum.
- **DYNALOGIC CONTROL BOX:**
User-friendly control box with self-diagnosis.
- **CONFORM TO EN13241-1**

Insulating curtain

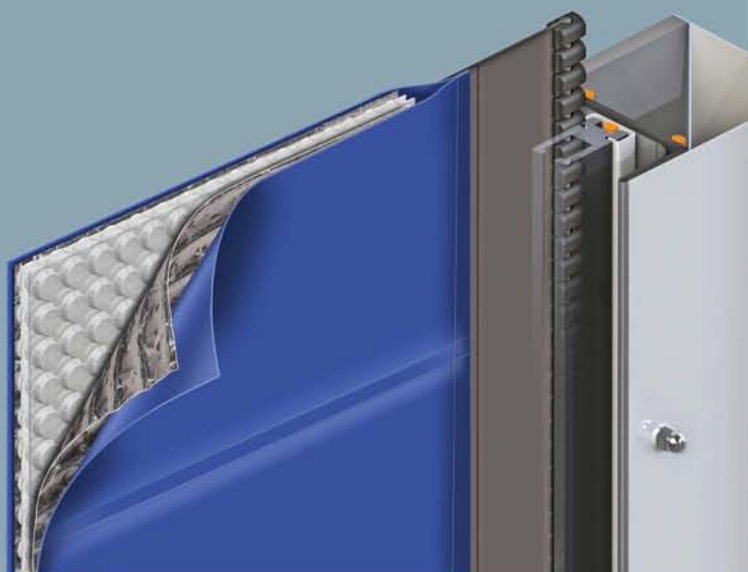

"PUSH-PULL^{PT}" drive technology

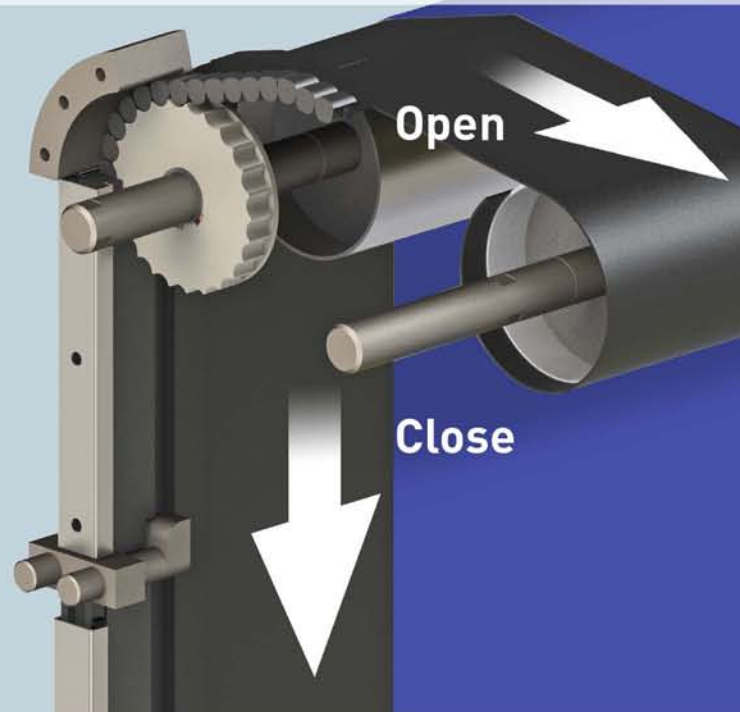

Push-Pull

gear driven technology

inside door




EN13241-1 STANDARDS

Standard	Ref.	Test acc.	Results
Water permeability	EN 12425	EN 12489	Class 1
Wind load	EN 12424	EN 12444	Class 1
Wind permeability	EN 12426	EN 12427	Class 1
Safe openings	EN 12453	EN 12445	Pass
Mechanical resistance	EN 12604	EN 12605	Pass
Unintended movements	EN 12604	EN 12605	Pass
Thermal resistance	EN 12428	EN 12428	6,02 W/m²K
Performance (cycles)	EN 12604	EN 12605	1.000.000


CHARACTERISTICS

Max. dimensions	W 4.000 mm x H 5.500 mm			
Opening speed	With standard curtain Up to 2,4 m/s	With insulating curtain Up to 1,2 m/s		
Closing speed	1,2 m/s	1,2 m/s		
Structure	Galvanised steel: 80 x 40 x 3 mm. Option: stainless steel.			
Drum	Steel - Ø 102 x 2 mm.			
Side guides	Reinforced polyethylene (PE-UHMW1000) on springs, heated			
Motor	4 poles, without brake. Power 1,5 kW IP rating: IP 65			
Control box	DYNALOGIC provided with: circuit breaker, general divider, adjustable timer, push button for opening and reset and emergency stop. IP rating: IP 54. Frequency inverter.			
Standard detectors	Infrared barrier: 300 mm from the floor. Wireless DYNACO detector (WDD).			
Power supply	Single phase 230V - 23 A			
Frequency	Frequency: 50-60 Hz			
Advised operating temperature:	- 30°C up to +5°C			
Available colours comparable with:	Yellow RAL1003		Green RAL6005	
(Actual colours may deviate. Colour samples available upon request)	Orange RAL2004		Grey RAL7035	
	Red RAL3000		White RAL9010	
	Blue RAL5002		Black RAL9005	

Side guide and lateral driving strap view

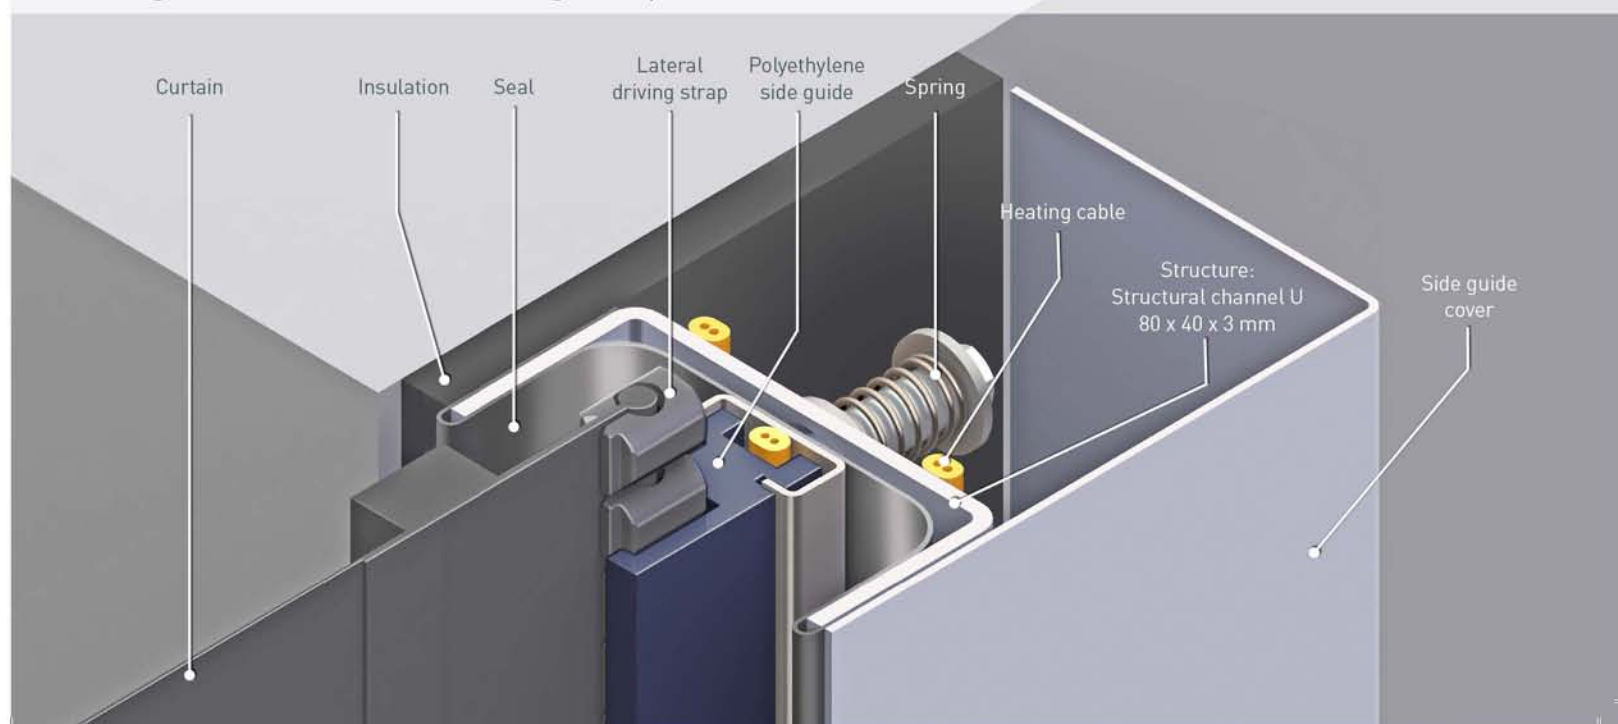

Dimensions and installation requirements DYNACO M2 FREEZER

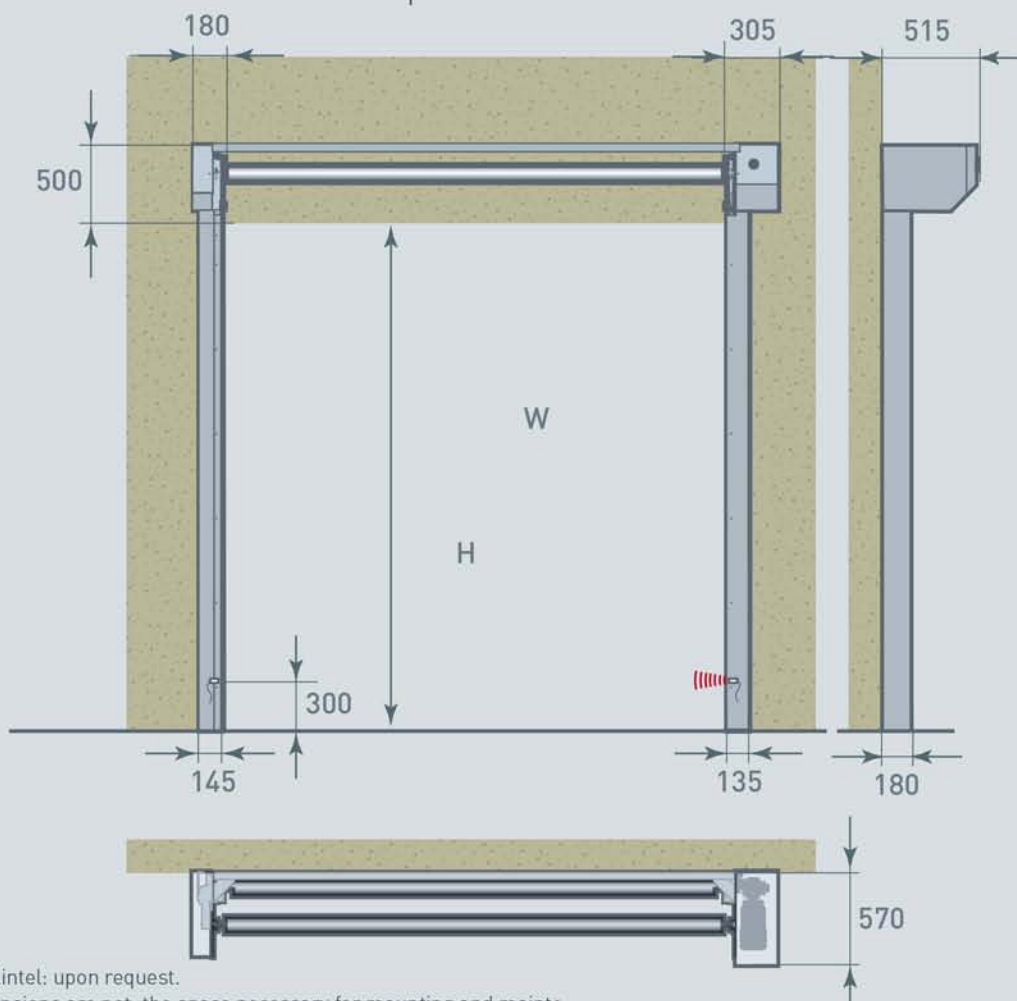

* Option reduced lintel: upon request.

All indicated dimensions are net: the space necessary for mounting and maintenance has to be provided. Weekly maintenance (de-icing) is necessary.

REMARK: Based on the risk analysis of the environment, extra push buttons and detectors might be required.

© All rights reserved by Entrematic - 2015

The DYNACO Entrematic products are protected by worldwide registered patents. As part of its policy of continuous product development, DYNACO Entrematic reserves the right to change the characteristics of its products or components without prior notice.

Disclaimers:

For a correct use of our products, please refer to our manual.

Everything that is mentioned in this brochure is only valid under the terms of use in the user manual and on condition that the door was properly installed and maintained and has not undergone abuse nor neglect.

Professional Equipment (PETE)

PO Box 3448, Iskan-1

Near Water Tank , Al Difa Area

Riyadh - 14424, Kingdom of Saudi Arabia

Telefax : 966 11 4989214

Mob : 966 54 5603773

Email : info@peteksa.com

www.peteksa.com

ENTRE/MATIC

